



PO Box 4647 Lancaster, PA 17604
 (717) 394-6871 Fax: (717) 394-1640
 www.hoytwirecloth.com




HOYT
 WIRE CLOTH

The *Shape*
 of things to come™

HI-RISE SPECS CURRENTLY AVAILABLE

CODE: 20 SUPERTOUGH HI-RISE
 24 STAINLESS STEEL HI-RISE

OPENING IN INCHES	OPENING IN MILLIMETERS	WIRE DIA	FINISHED SIZE	HI-RISE% OPEN AREA	ROUND WIRE % OPEN AREA	INCREASED OPEN AREA WHEN USING HI-RISE	CRIMP TYPE
5/32"	4	0.08	(.060/.090)	52.2	43.7	19.5	W-D
1/4"	6.4	0.120	(.101/.152)	54.4			W-D
1/4"	6.4	0.135	(.101/.152)	50.7	42.2	20.1	W-D
5/16"	7.9	0.135	(.101/.152)	57.1	48.8	17.2	W-D
11/32"	8.7	0.148	(.110/.167)	57.4	48.8	17.6	W-D
3/8"	9.5	0.120	(.089/.134)	65.3	57.4	13.7	W-D
3/8"	9.5	0.148	(.110/.167)	59.8	51.4	16.3	W-D
3/8"	9.5	0.162	(.121/.182)	57.2	48.7	17.5	W-D
7/16"	11.1	0.135	(.101/.152)	66	58.4	12	W-D
7/16"	11.1	0.162	(.121/.182)	61.3	53.2	15.2	W-D
7/16"	11.1	0.192	(.145/.215)	56.4	48.3	16.8	W-D
15/32"	12	0.120	(.089/.134)	70.6	63.4	11.3	W-D
15/32"	12	0.148	(.110/.167)	65.6	57.8	13.5	W-D
15/32"	12	0.162	(.121/.182)	63.2	55.2	14.5	W-D
15/32"	12	0.192	(.145/.215)	58.3	50.3	15.9	W-D
1/2"	12.7	0.120	(.089/.134)	72.1	65.0	10.9	W-D
1/2"	12.7	0.148	(.110/.167)	67.2	59.5	12.9	W-D
1/2"	12.7	0.162	(.121/.182)	64.8	57.1	13.7	W-D
1/2"	12.7	0.192	(.145/.215)	60.1	52.2	15.1	W-D
1/2"	12.7	0.225	(.168/.255)	56	47.5	17.9	W-D
17/32"	13.5	0.192	(.145/.215)	61.7	54	14.3	W-D
9/16"	14.3	0.148	(.110/.167)	70	62.6	11.8	W-D
9/16"	14.3	0.162	(.121/.182)	67.7	60.3	12.3	W-D
9/16"	14.3	0.192	(.145/.215)	63.2	55.6	13.7	W-D
19/32"	15	0.192	(.145/.215)	64.6	57.1	13.1	W-D
5/8"	16	0.148	(.110/.167)	73.4	65.4	11.2	W-D
5/8"	16	0.192	(.145/.215)	65.9	58.5	12.6	W-D
5/8"	16	0.225	(.168/.255)	62.1	54.1	14.8	W-D
11/16"	17.5	0.148	(.110/.167)	74.3	67.7	9.7	W-D
11/16"	17.5	0.162	(.121/.182)	72.3	65.5	10.4	W-D
11/16"	17.5	0.177	(.121/.205)	72.3	63.2	14.4	W-D
3/4"	19.1	0.148	(.110/.167)	76.1	69.8	9	W-D
3/4"	19.1	0.192	(.145/.215)	70.2	63.4	10.7	W-D
3/4"	19.1	0.250	(.187/.282)	64.1	56.3	13.9	W-D
13/16"	20.6	0.192	(.145/.215)	72.0	65.4	10.1	W-D
7/8"	22.2	0.192	(.145/.215)	73.6	67.2	9.5	W-D
7/8"	22.2	0.225	(.168/.255)	70.4	63.3	11.2	W-D
7/8"	22.2	0.250	(.181/.290)	68.7	60.5	13.6	W-D
7/8"	22.2	0.312	(.237/.348)	61.9	54.3	14.0	W-D
15/16"	23.8	0.225	(.168/.255)	71.9	65.0	10.6	W-D
15/16"	23.8	0.250	(.187/.282)	69.5	62.3	11.6	W-D
1"	25.4	0.192	(.145/.215)	76.3	70.4	8.4	W-D
1"	25.4	0.207	(.155/.233)	75.0	68.6	9.3	W-D
1"	25.4	0.250	(.187/.282)	71.0	64.0	10.9	P-S*
1"	25.4	0.312	(.237/.348)	65.4	58.1	12.6	P-S*
1 1/16"	27	0.250	(.187/.282)	72.3	65.5	10.4	P-S*
1 1/16"	27	0.312	(.237/.348)	66.9	59.8	11.9	P-S*
1 1/8"	28.6	0.250	(.187/.282)	73.5	66.9	9.9	S
1 1/8"	28.6	0.312	(.237/.348)	68.2	61.2	11.4	S
1 1/4"	31.8	0.250	(.187/.282)	75.7	69.4	9.0	S
1 1/4"	31.8	0.312	(.237/.348)	70.7	64.0	10.5	S
1 3/8"	34.9	0.250	(.187/.282)	77.5	71.6	8.2	S
1 1/2"	38.1	0.250	(.187/.282)	79.1	73.4	7.8	S
1 1/2"	38.1	0.312	(.237/.348)	74.6	68.5	8.9	S
1 5/8"	41.3	0.250	(.187/.282)	80.4	75.1	7.1	S
1 5/8"	41.3	0.312	(.237/.348)	76.2	70.4	8.1	S
1 3/4"	44.5	0.312	(.237/.348)	77.6	71.9	7.9	S
1 7/8"	47.6	0.250	(.187/.282)	82.7	77.9	6.2	S
1 7/8"	47.6	0.312	(.237/.348)	78.8	73.4	7.4	S
2"	50.8	0.250	(.187/.282)	83.6	79.0	5.8	S

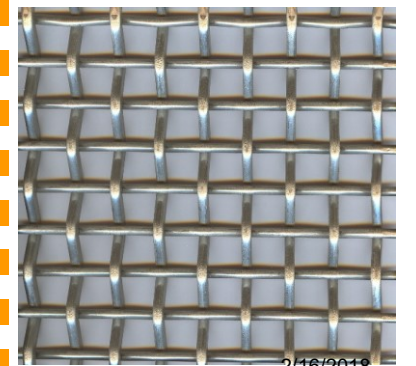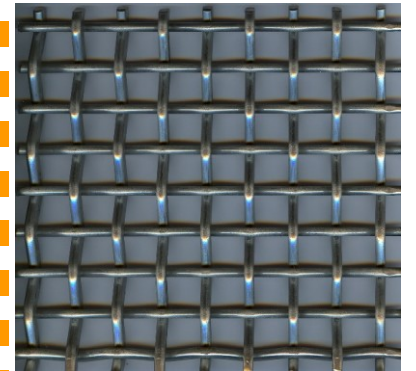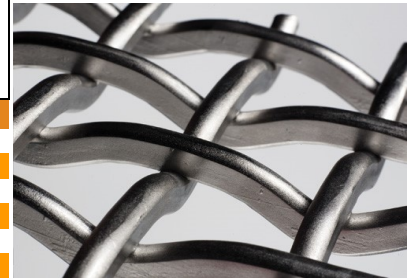

2/16/2018

*P-S IS PRESS CRIMPED SPEC AND NEEDS AN 18 EDGE ON ESE PANELS